


SCOPE OF WORK

- Work detailed below will be performed on the concrete section of roadway on US 278/431 (Meighan Blvd.) between Jones Street and 12th Street in Gadsden, AL in the 1st Division. (See attached map.)
- Each contractor will submit with their bid, proof of licensing through the State Licensing Board for General Contractors under the provisions of Title 34, Chapter 8, Code of Alabama, 1975, with approved maximum bid limits sufficient to cover bid related to this specification. **Failure to comply will be cause for rejection of this bid.** A copy of the vendor's current license will expedite the evaluation process.
****APPLIES TO BID IN EXCESS OF \$50,000.00 ONLY****
- Fibrecrete, manufactured by Fibrecrete Technologies, LLC, patching material or an approved equal will be used to repair the miscellaneous concrete spalls.
- The approximate areas and extent of patching will be identified by the Engineer.
- Within 7 days of the Notice to Proceed, the contractor shall submit a description of all equipment to be used and the procedure for placing, compacting, finishing and curing the patching material.
- The contractor shall not begin the patching work until the Engineer informs the contractor that the submittal is complete.
- Traffic shall not be placed on the completed patching work until approved by Engineer. Traffic control will be furnished by the contractor. All traffic control will be in accordance with the MUTCD. Lane closures will be allowed Monday thru Friday 8:00 a.m. to 4:00 p.m.
- The Contractor shall warrant the performance of the work for a period of 2 years from the date of the completion of all patching work. The patching work will not be accepted for final payment until a written warranty is submitted and accepted by the Engineer as being sufficient to cover performance of the patching work. The warranty shall be a commitment to repair all cracks and spalls in the patched areas within 7 calendar days of being notified of the failure of the patching.
- Patching material will be measured by the pound of material placed in the completed patch, with deductions being made for wasted and spilled material.
- The approximate quantity of Fibrecrete or an approved equal will be 20,000 pounds.
- Contractor shall submit a price per pound of the estimated quantity. The unit price shall be full compensation for all materials, tools and labor, and traffic control required to complete the patching work.
- Any required traffic striping will be completed by ALDOT.
- By signing this bid the contractor certifies that site conditions have been observed (site visit) and bidder knows what is required to successfully complete this project. Agency contact is Ben Thackerson – 256-442-4436 (office) or 256-264-5715 (cell) to set up site visit.
- Bids will be evaluated based on the lowest total price for the above-mentioned work based on the bid quantity of 20,000 pounds and all traffic control.

- Contractor shall coordinate all work through Mr. Ben Thackerson, District Manager at (256) 442-4436 Office or (256) 264-5715 Cell
- Invoicing frequency will be no more than once a month. Invoices shall indicate the number of pounds being billed for that invoice.
- Please mail invoice to address below:

Alabama Department of Transportation
District 5 Manager
4509 Airport Road
Gadsden, AL 35904

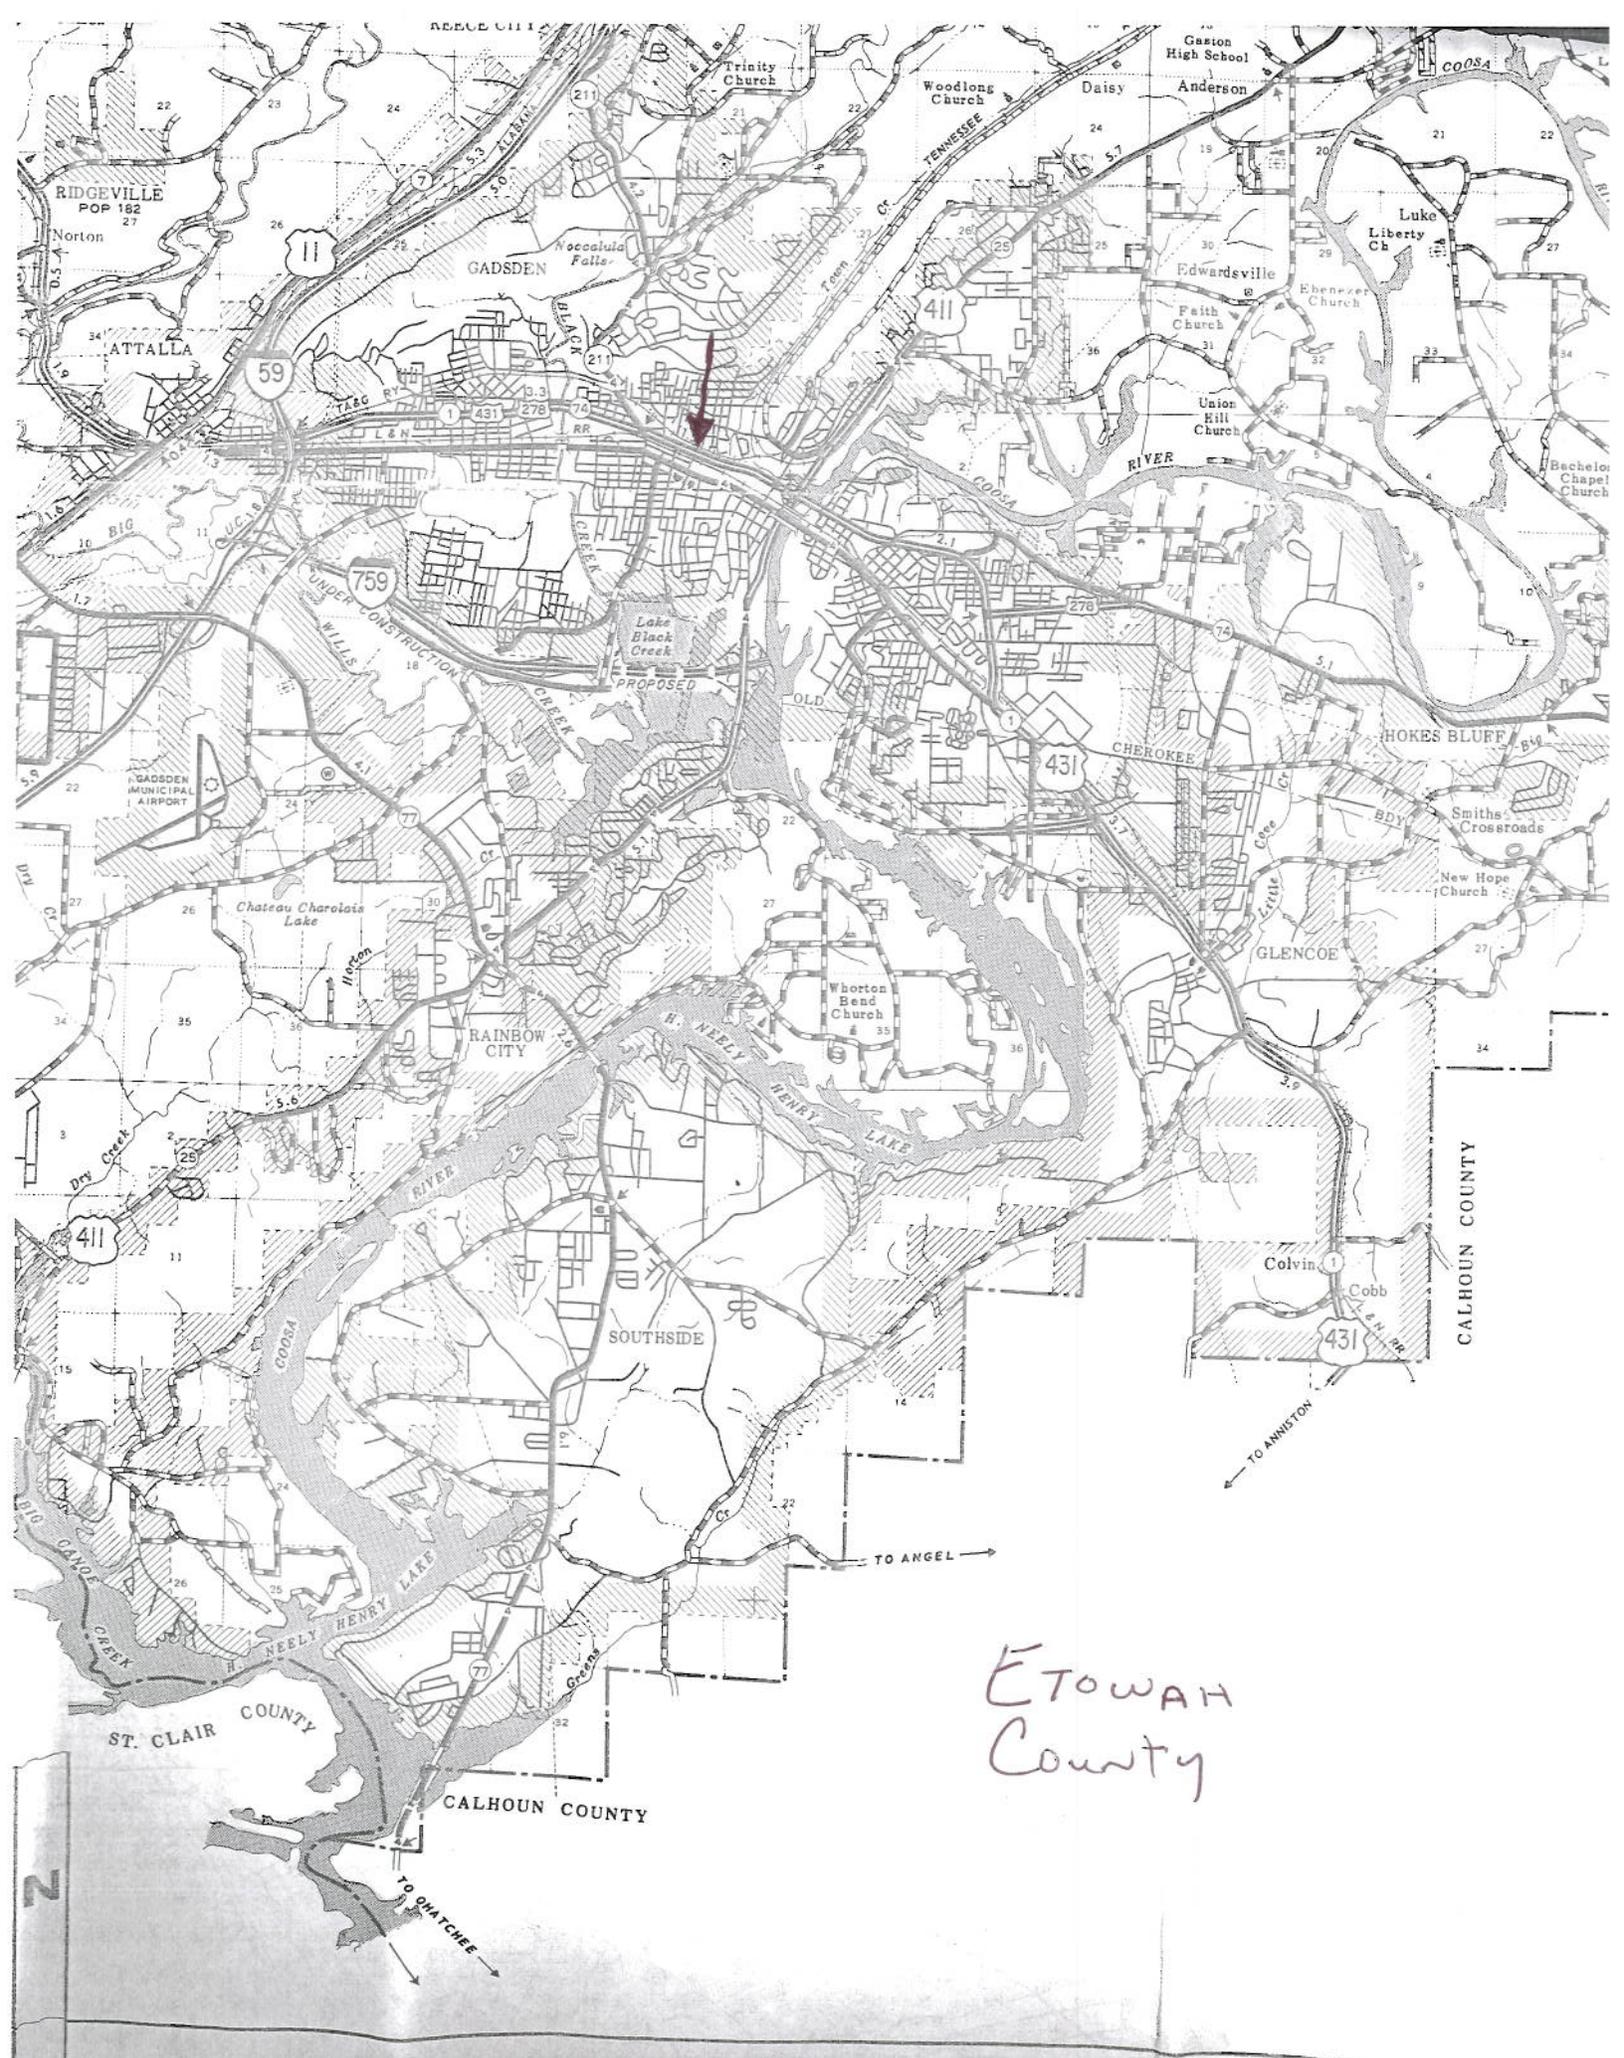

Etowah
County