4200 White Pike, Cherokee, AL 35616

COMMODITY CODE:

Aerial services for aerial application site preparation and site preparation burning on up to 1,322+/- acres and tree planting on 943+/- acres of Forever Wild Land Trust land located in following locations:

Colbert County, AL

Spray, burn and plant:
Riverton North Tract - Township 2 South, Range 14 West, Section 19 the Southwest quarter and Section 30; Township 2 South, Range 15 West, Section 25 the East half of the Southeast quarter
Ables Tract - Township 3 South, Range 14 West, Section 7 the Southeast quarter and Section 18
Firetower Tract - Township 4 South, Range 13 West, Section 8 the East half of the Southeast quarter and Section 9 the South half
Sutton Hills #3, 6 Tract - Township 4 South, Range 14 West, Section 18 the South half and Section 19 the North half of the Northeast quarter
Mt. Mills #18, 19 Tract - Township 5 South, Range 14 West, Section 18 the Southwest quarter and Section 19 the West half

Spray and burn only:
Mt. Mills #10, 11 Tract - Township 4 South, Range 14 West, Section 25 and Section 26 the Southeast quarter
Sutton Hills #3 West Tract - Township 4 South, Range 14 West, Section 7 the Southwest quarter of the Southwest quarter and Section 18 the West half ; Township 4 South, Range 15 West, Section 13 the North half

Provide all chemicals and labor relating to aerial application site preparation, site preparation burning and tree planting on the above described lands during favorable environmental conditions, located near the town Cherokee in Colbert County, Alabama.

The contractor will be required to post security for performance in the amount of $10,000. The required security may be in the form of a certified check, an irrevocable letter of credit with a bank approved by the State Lands Division, or a surety bond with a company authorized to do business within the State of Alabama.

The following herbicide prescription will be applied to the treatment areas that will also be planted, 943 +/- acres, as a tank mix:

24 ounces of 4 lb. product per gallon Arsenal Herbicide or generic equivalent per acre
2 quarts of 5.4 lb. product per gallon Accord XRT II Herbicide or generic equivalent per acre
4 ounces of Oust EXTRA or generic equivalent per acre
Appropriate type and quantity of adjuvant
15 Gallons water per acre

Herbicide application timing will be from Aug. 20, 2013 through Sept. 30, 2013.

The following herbicide prescription will be applied to the treatment areas that will **NOT** be planted, 379 +/- acres, as a tank mix:

24 ounces of 4 lb. product per gallon Arsenal Herbicide or generic equivalent per acre
2 quarts of 5.4 lb. product per gallon Accord XRT II Herbicide or generic equivalent per acre
1 ounce of Oust XP or generic equivalent per acre
Appropriate type and quantity of adjuvant
15 Gallons water per acre

Herbicide application timing will be from Aug. 20, 2013 through Sept. 30, 2013.
Fire lanes must be established. Use of fire plows are not permitted due to possible long term erosion problems.

Site preparation burn timing will be from October 30, 2013 thru February 28, 2014.

Tree planting timing will be from Completion of burning thru February 28, 2014.

On the following tracts: Riverton North
Ables

planting of 4-inch plug containerized shortleaf pine seedlings provided by State Lands Division on a ten foot by ten foot (10'x 10') spacing (436 stems per acre) in such a manner as to insure the establishment of 330 surviving stems at the end of the first growing season.

On the following tracts: Firetower
Mt. Mills #18, 19
Sutton Hills #3, 6
planting of 4-inch plug containerized shortleaf pine seedlings provided by State Lands Division on a ten foot by eight foot (10'x 8') spacing (545 stems per acre) in such a manner as to insure the establishment of 400 surviving stems at the end of the first growing season.

If these thresholds are not met at the end of the first growing season, contractor must take appropriate action to ensure that the threshold is met at the end of subsequent growing seasons. The work must be done in a good and workmanlike manner in accordance with the latest technology.

The contractor will provide portable refrigerated storage for seedlings so seedlings are kept in a proper temperature-controlled environment until the day trees are to be planted. Seedlings will be delivered to Alabama DCNR facilities at 4200 White Pike Rd., Cherokee, AL by International Forest Co. who is growing the seedlings. Contractor will coordinate delivery of seedlings with International Forest Co. Contractor needs to provide International Forest Company with a minimum of 7 days notice for seedling deliveries.

Each of the above described work components must be approved by the State lands Division prior to the initiation of work. State Lands Division requires contractors to utilize all applicable Best Management Practices for Forestry relating to herbicide application and prescribed burning.

A pre-bid site visit is suggested. Contact Gary Wilkinson for a site visit at SLINC 1*152*194 or 334-534-1845. For additional information call Ricky Hunt @ SLINC 1*152*195 or 334-534-1843.

Alabama State Lands Division
2013 Reforestation Sites
Map 1- Colbert Co., AL
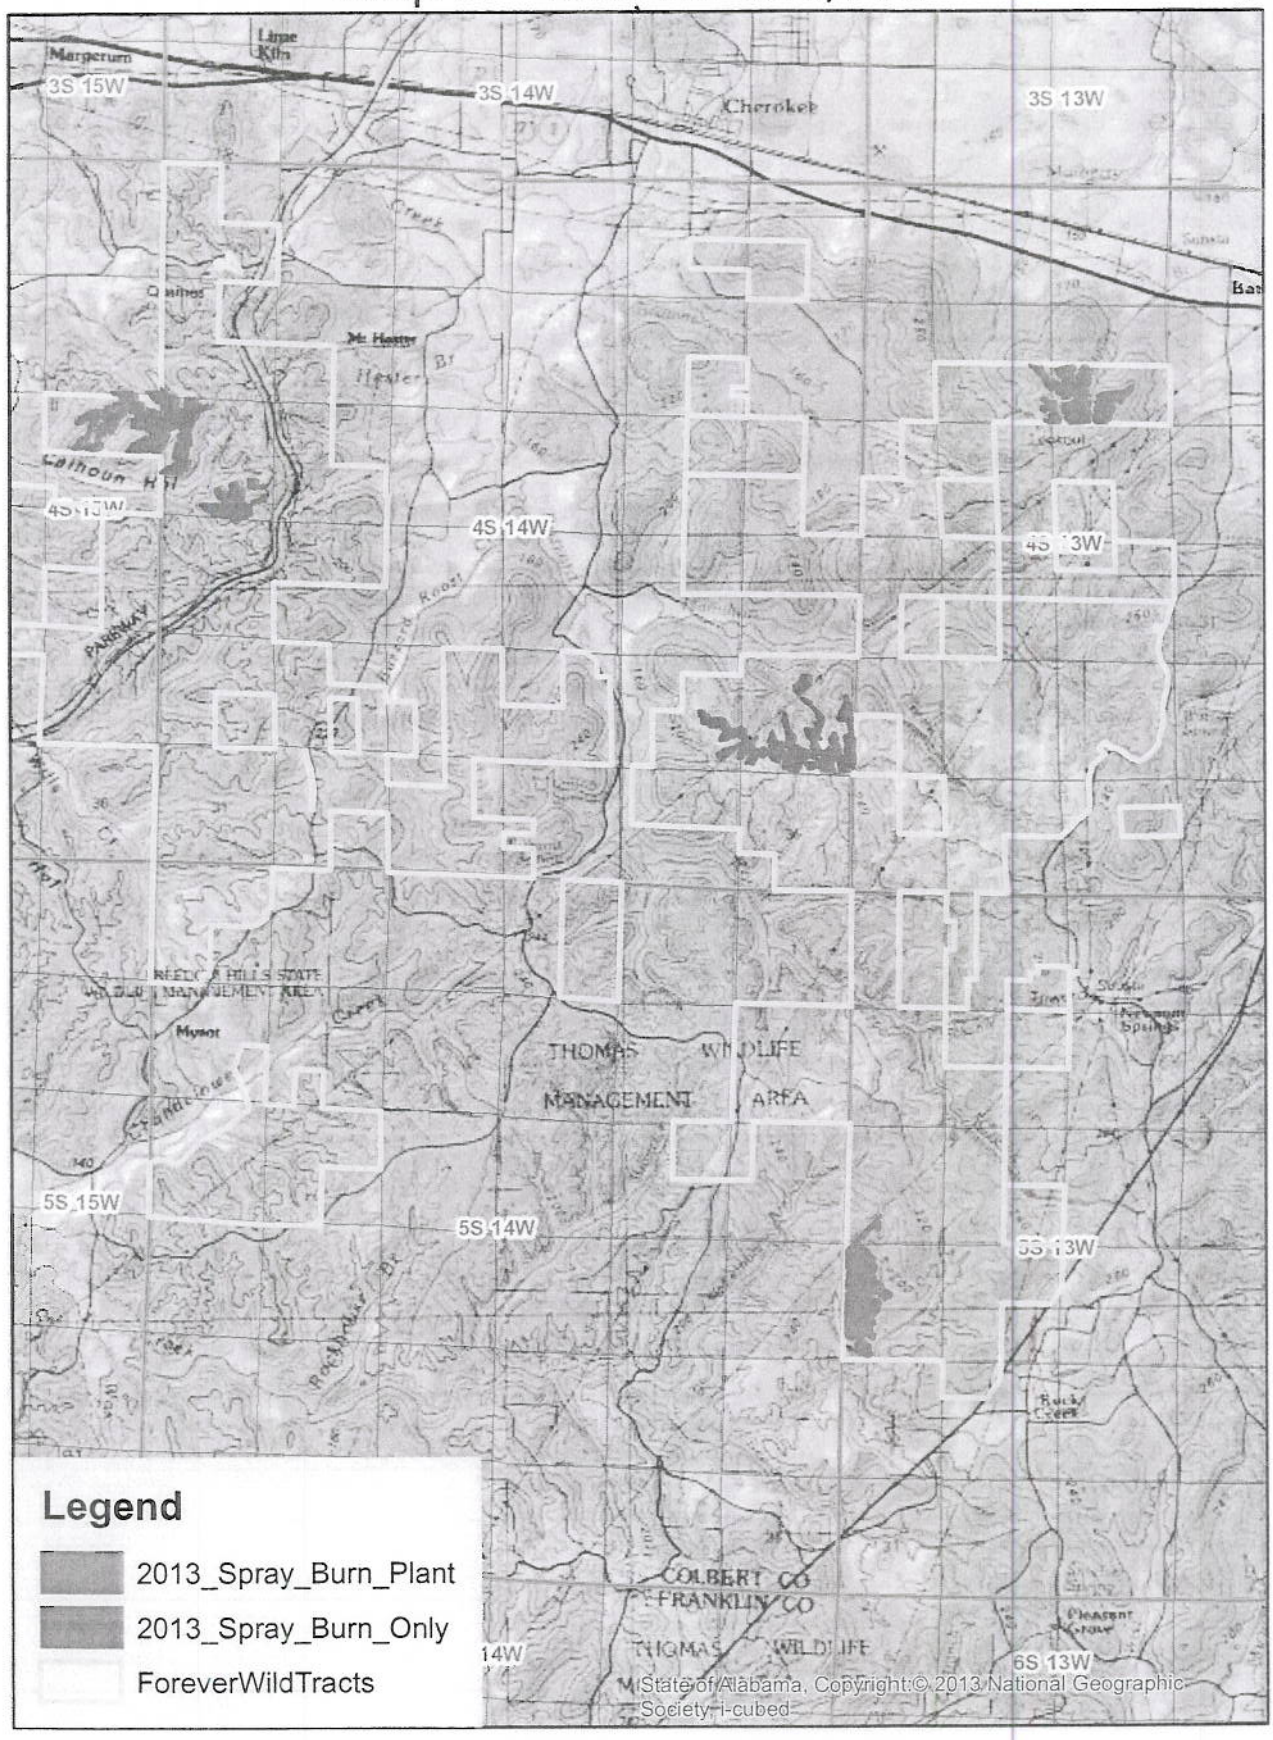
Alabama State Lands Division
2013 Reforestation Sites
Map 2 - Colbert Co., AL